


IF IN DOUBT-ASK
DO NOT SCALE

F	G	H	J	K	L	M	N	P	Q	R	S	T	U	V
195.3	58.9	104.1	178.3	198.1	106.7	11.2	104.1	177.8	200.7	46.7	157.5	134.1	38.1	200.9

FRAME	"A"	"B"	"C"	"D"	"X"	NETT. WT.(Kg)
PI4HI / PI2HI	723	641	501.5	347	335	180
PI4JI / PI2JI	753	671	531.5	362	350	190
PI4KI	768	686	546.5	368	355	200

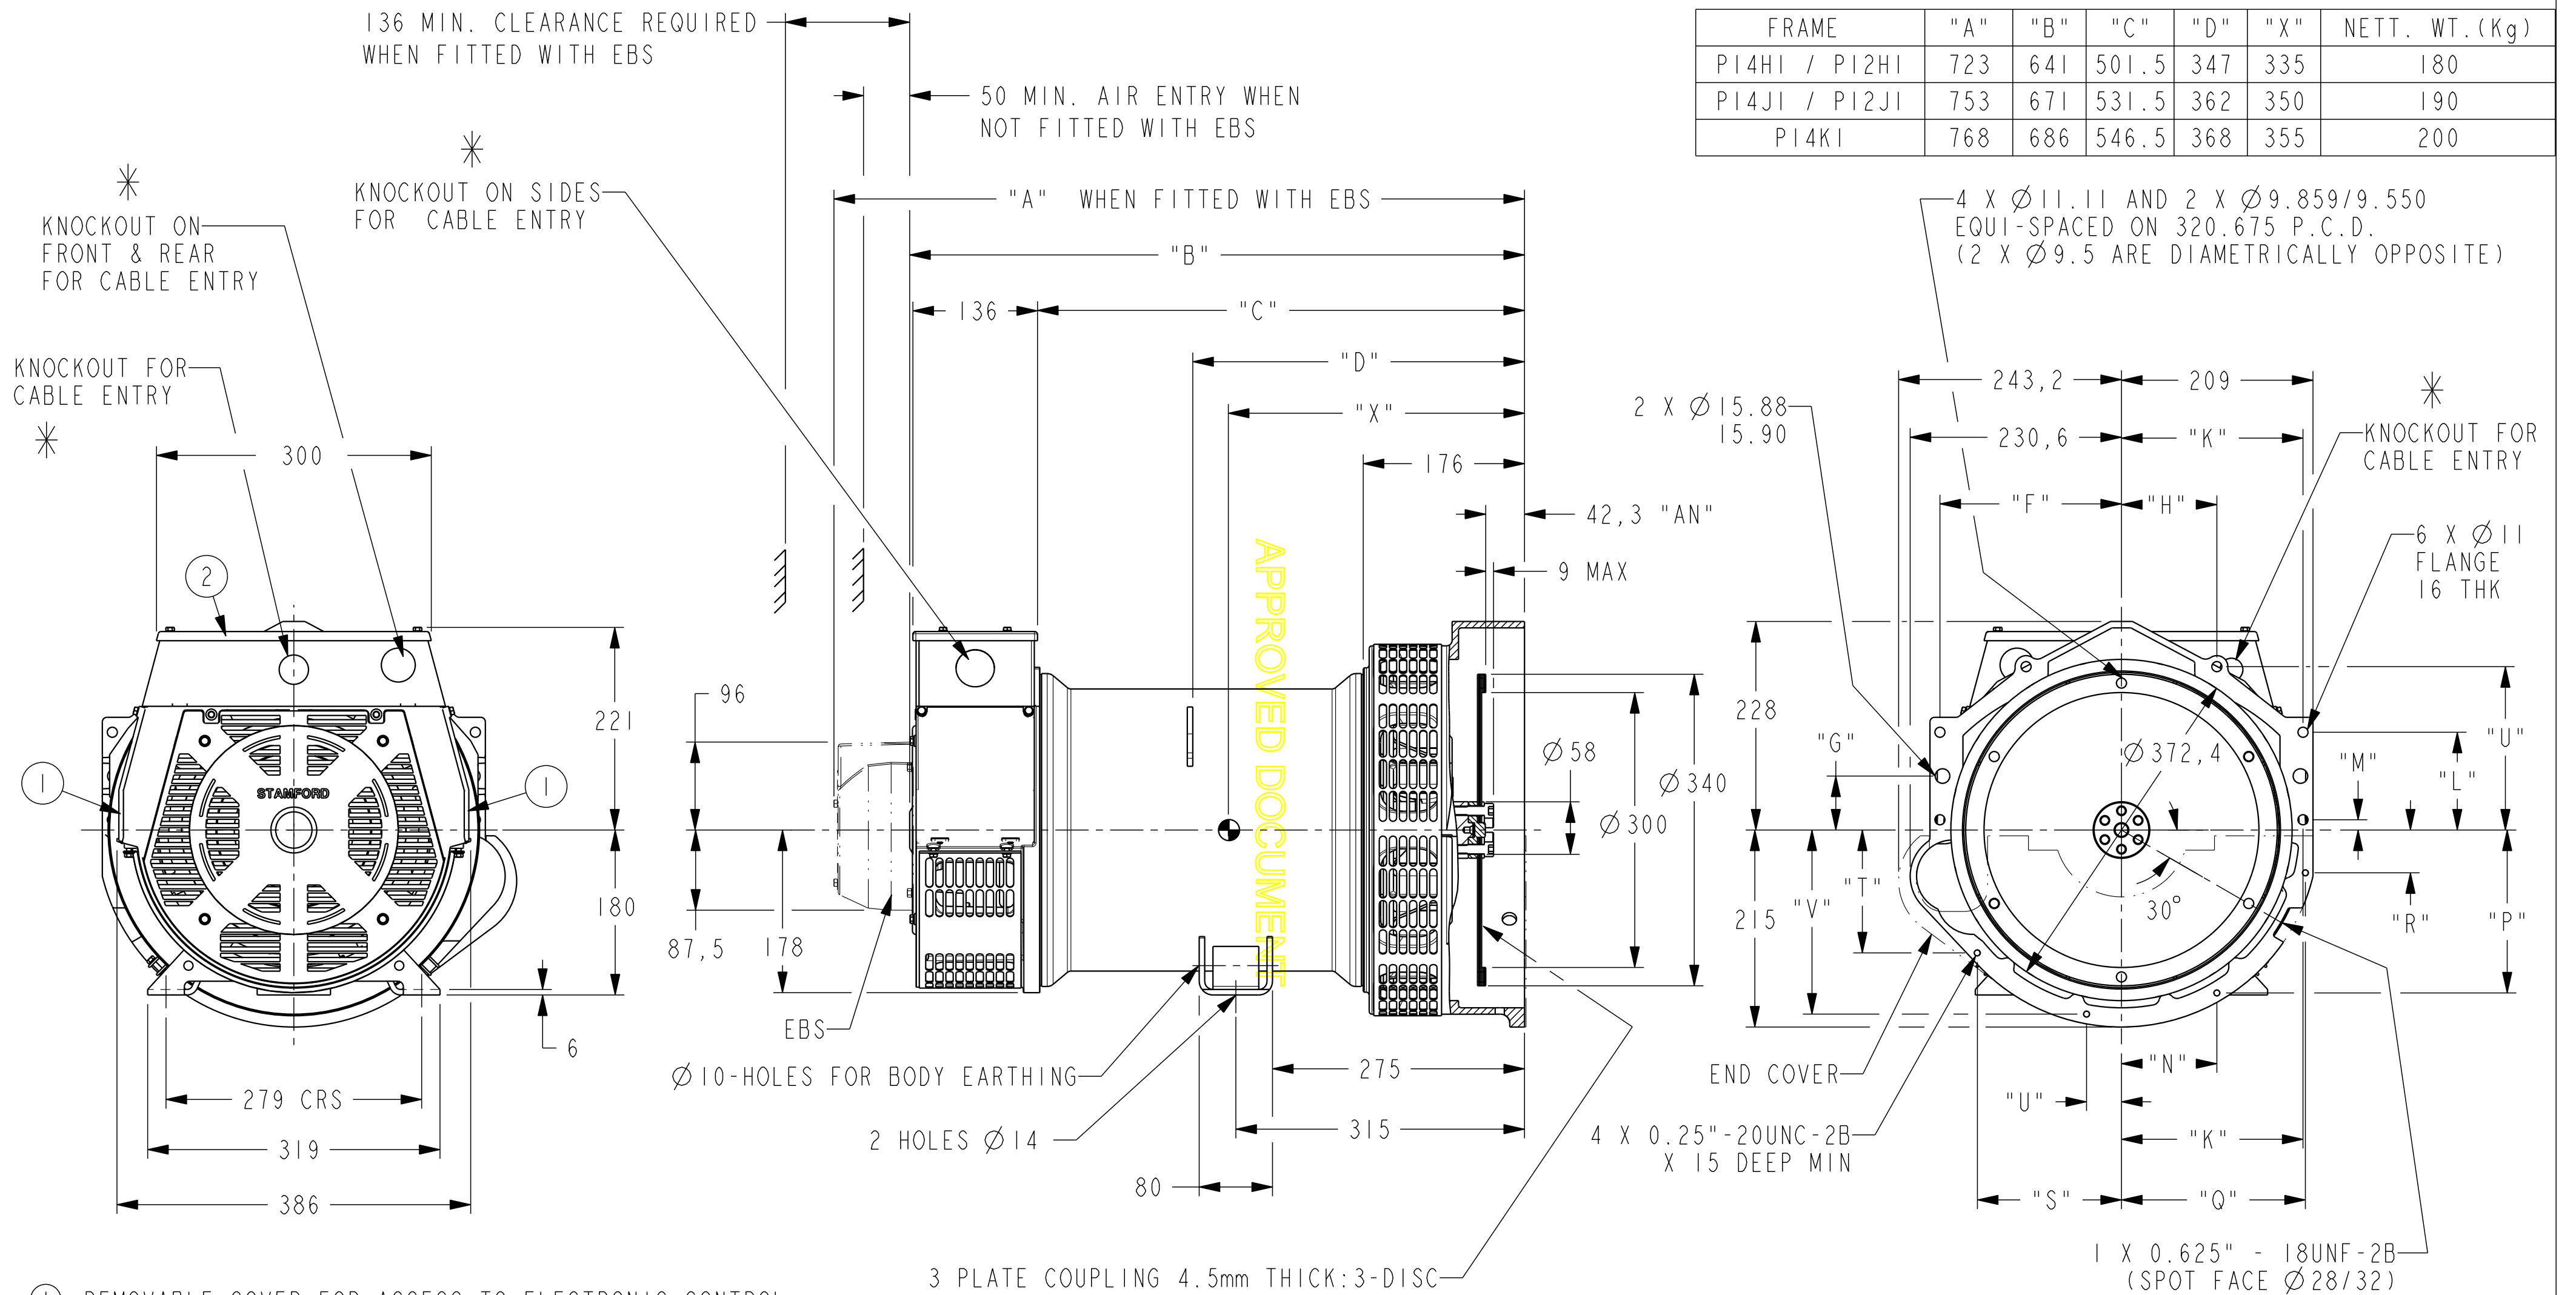

- ① - REMOVABLE COVER FOR ACCESS TO ELECTRONIC CONTROL
- ② - REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS
- * - FOR KNOCKOUT DEATAILS REFER TO TERMINAL BOX DRAWING

3 PLATE COUPLING 4.5mm THICK:3-DISC
SPACER 4.5mm THICK:TOTAL THICKNESS
9mm:HUB SECURING SCREWS TO BE
TIGHTENED TO A TORQUE OF 7.6 kgfm(75Nm)

CONFIDENTIAL PROPERTY OF CUMMINS GENERATOR TECHNOLOGIES LTD	DIMENSIONS IN MILLIMETRES (MM) AT 20°C		PROJECTION 		PI H/J/K 4-P & PI H/J 2-P I- BEARING ALTERNATOR WITH ADAPTOR / COUPLING TO SUIT 'GM' ENGINES STANDARD TERMINAL BOX
	UNLIMITED DIMS ± --	DRAWN BSR 02.08.07	CHECKED DW 06/03/09	APPROVED SMH 06/03/09	

MOD.	ISSUE	DRAWN	DATE	MODIFICATION
4-9667-48	C	DW	06/03/09	NOTES FOR KNOCKOUTS MODIFIED
4-9346-43	B	DW	14/02/08	UPDATED T/BOX AND ADAPTOR
4-9111-32	A	BSR	02.08.07	ORIGINAL ISSUE