


IF IN DOUBT-ASK
DO NOT SCALE

F	G	H	J	K	L	M	N	P	Q	R	S	T	U	V
195.3	58.9	104.1	178.3	198.1	106.7	11.2	104.1	177.8	200.7	46.7	157.5	134.1	38.1	200.9

FRAME	A	B	C	D	X	NETT WT. (Kg)
PI2DI	599	516	286	293	280	125
PI4DI	599	516	286	293	280	130
PI2EI	624	541	311	318	295	140
PI2FI	639	556	326	333	310	150
PI2GI	679	596	366	373	330	165

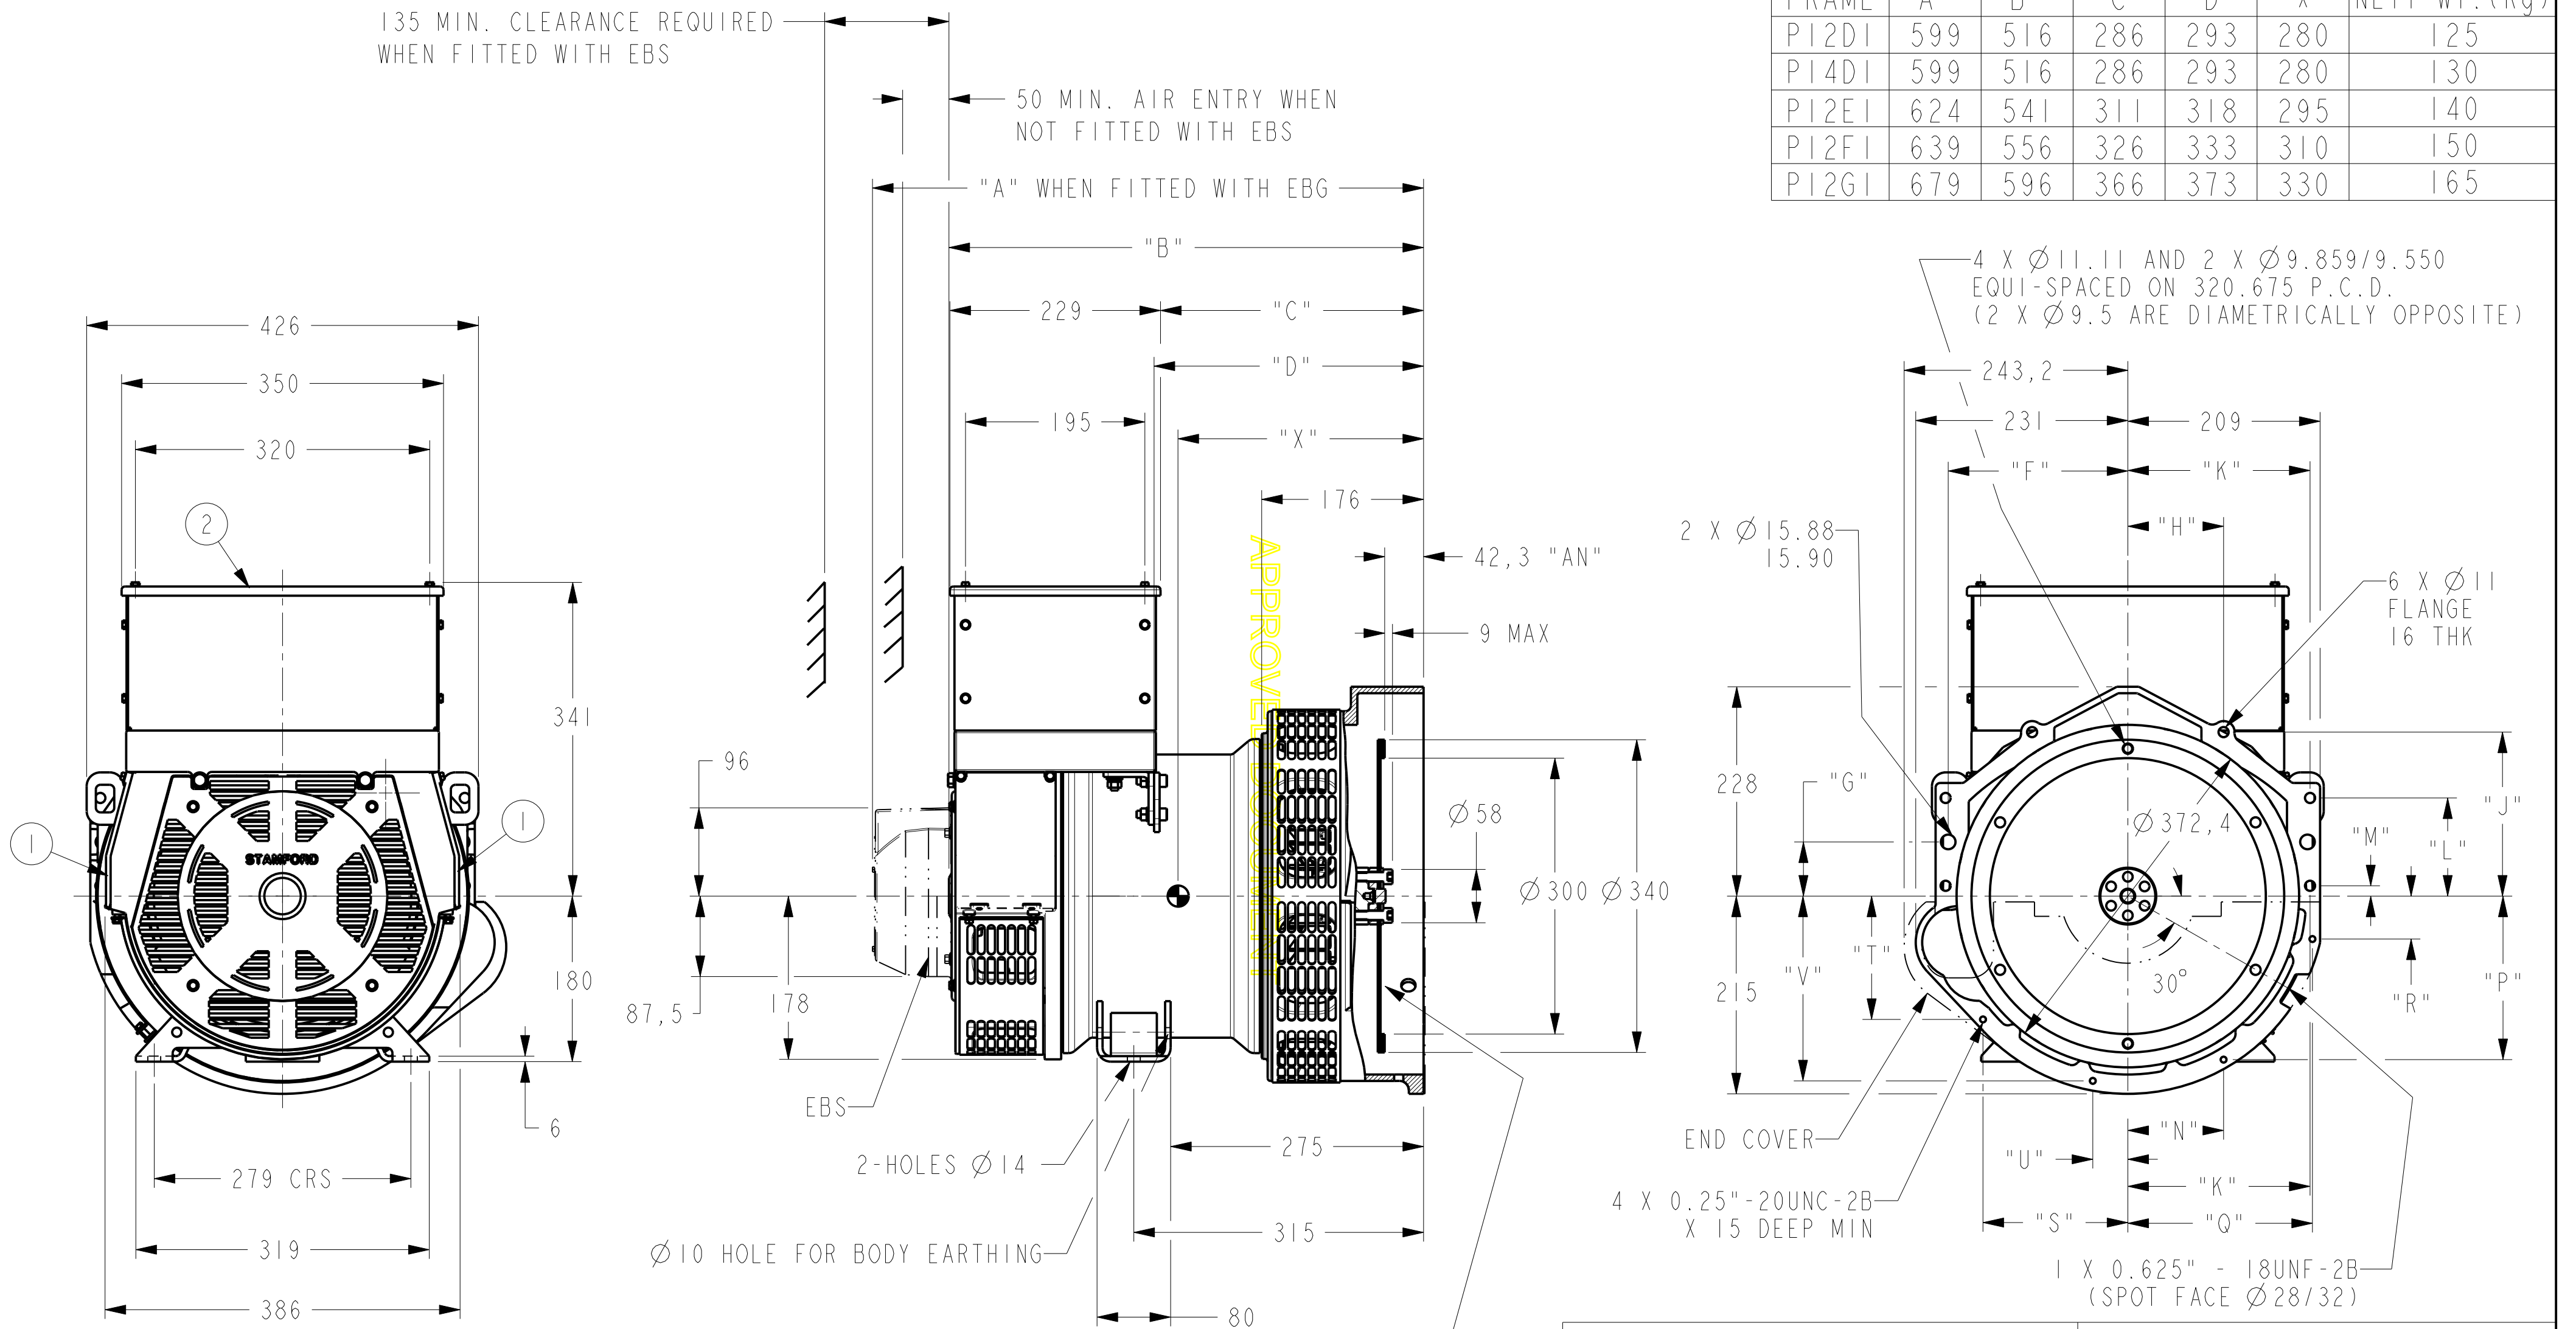

- ① - REMOVABLE COVERS FOR ACCESS TO ELECTRONIC CONTROL
- ② - REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS

2 PLATE COUPLING 3mm THICK:3-DISC
SPACER 4.5mm THICK:TOTAL THICKNESS
7.5mm:HUB SECURING SCREWS TO BE
TIGHTENED TO A TORQUE OF 7.6 kgfm(75Nm)

CONFIDENTIAL	PROPERTY OF CUMMINS GENERATOR TECHNOLOGIES LTD		PID 4-POLE AND PI D/E/F/G 2-POLE I-BEARING ALTERNATOR WITH ADAPTER / COUPLING TO SUIT "GM" ENGINES LARGE T/BOX - REMOVABLE SIDE PANELS	
	DIMENSIONS IN MILLIMETRES (MM) AT 20°C		DRG. SIZE C	
UNLIMITED DIMS ± --		PROJECTION 		SCALE 1:5
		DRAWN DW	14/2/08	REL. PHASE P
		CHECKED DW	14/2/08	PART No 19-1124
		APPROVED SMH	14/2/08	ISSUE A
		Pro/ENGINEER		SHEET 1 OF 1 SHEETS

4-9346-48	A	DW	14/2/08	ORIGINAL ISSUE
MOD.	ISSUE	DRAWN	DATE	MODIFICATION